



SPDS TYPE 2 DG MOD 275



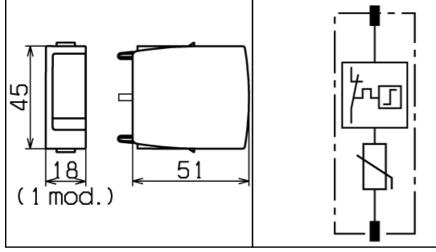



Basic circuit diagram DG MOD varistor-based protection module

DG MOD ...: Varistor-based protection module for DEHNguard M ... and DEHNguard S ... surge



High discharge capacity due to heavy-duty zinc oxide varistors/spark gaps

High reliability due to "Thermo Dynamic Control" SPD monitoring device

Energy coordination within the Red/Line product family

Operating state/fault indication by indicator flag in window

Easy replacement of protection modules without tools by module locking system with module release button

The plug-in protection module can be replaced without the need to de-energise and without removing the distribution board cover

Vibration- and shock-tested according to EN 60068-2

	DG MOD 275	
Nominal discharge current (8/20 μs) [I _{n]}	20 kA	
Max. discharge current (8/20 μs) [I _{max]}	40 kA	
Max. continuous operating a.c. voltage [U _{C]}	275 V	
Max. continuous operating d.c. voltage [U _{C]}	350 V	
Ordering information		
Туре	DG MOD 275	
Part No.	952 010	
Packing unit	1 pc	

We reserve the right to modify design, technology, dimensions, weights and materials according to technical progress. Illustrations are non-binding. Pictures may differ from the modules described.