

Coaxial Bandpass Filter

ZX75BP-1100+

50Ω 1000 to 1200 MHz

The Big Deal

- Fast roll-off on the upper sideband
- Good Matching and low loss in the pass band
- Connectorized package



CASE STYLE: KE1467

Product Overview

ZX75BP-1100+ is a wideband bandpass filter in a rugged connectorized package covering 1000 to 1200 MHz. This is designed for asymmetric rejection applications such as super-heterodyne receivers. By having asymmetric band, faster roll-off at upper side band is achieved in a comparatively smaller package and lower pass band insertion loss. It has repeatable performance across lots and consistent performance across temperature

Key Features

Feature	Advantages
Fast roll-off on the upper side band	Wide bandwidth filter with fast-roll off on the upper side band, which increases selectivity on the adjacent channel.
Good matching and low loss in pass band	This filter has good matching and low loss in the pass band
Connectorized package	Connectorized package is easy to interface with other devices and well suited for test setups.
High power handling	This model uses high Q capacitors and high current handling inductors which is well suited for high power applications.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Bandpass Filter

50Ω 1000 to 1200 MHz

ZX75BP-1100+



CASE STYLE: KE1467
 Connectors Model
 SMA-MF ZX75BP-1100-S+

Features

- Fast roll-off on the upper side band
- Good matching in the pass band
- Connectorized package

Applications

- Aviation and aeronautical
- Aeronautical radio navigation
- Radar systems
- Navigation systems

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	-	-	1100	-	MHz
	Insertion Loss	F1-F2	1000-1200	0.7	2.0	dB
	VSWR	F1-F2	1000-1200	1.2	1.78	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 25	20	30	dB
	VSWR	DC-F3	DC - 25	-	20	:1
Stop Band, Upper	Insertion Loss	F4-F5	1500-1900	20	30	dB
	VSWR	F4-F5	1500-1900	-	20	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	3.2 W max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

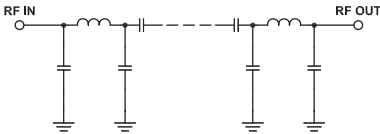

Typical Frequency Response







Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	57.98	1737.18	1000	1.59
5	43.96	1737.18	1020	1.58
25	30.02	1737.18	1030	1.58
70	21.37	434.30	1040	1.59
150	15.81	133.63	1050	1.59
600	8.88	21.20	1060	1.60
830	3.05	4.95	1070	1.61
1000	0.39	1.16	1080	1.63
1100	0.43	1.09	1090	1.65
1200	0.57	1.15	1100	1.67
1235	0.72	1.30	1110	1.70
1265	1.19	1.80	1120	1.72
1300	3.03	3.73	1130	1.76
1380	12.96	23.18	1140	1.79
1440	20.89	42.38	1150	1.83
1500	28.10	54.29	1160	1.88
1520	30.37	56.04	1170	1.93
1650	44.58	66.82	1180	1.98
1800	63.04	75.53	1190	2.05
1900	87.41	78.97	1200	2.13

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Connections

INPUT	SMA-MALE
OUTPUT	SMA-FEMALE

Outline Drawing

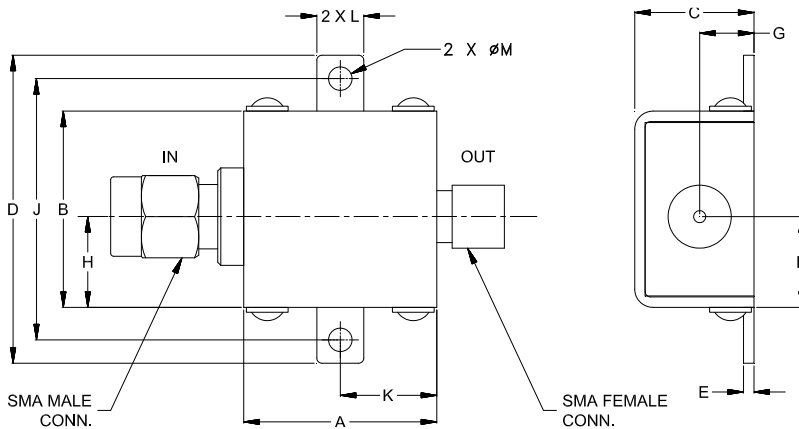

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	G
.74	.75	.46	1.18	.04	.349	.21
18.80	19.05	11.68	29.97	1.02	8.86	5.33
H	J	K	L	M	Wt.	
.349	1.00	.37	.18	.09	grams	
8.86	25.40	9.40	4.57	2.29	24.4	

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

