


Sized draw standard version: CW Measures without tolerance according to UNI ISO 2768-mk

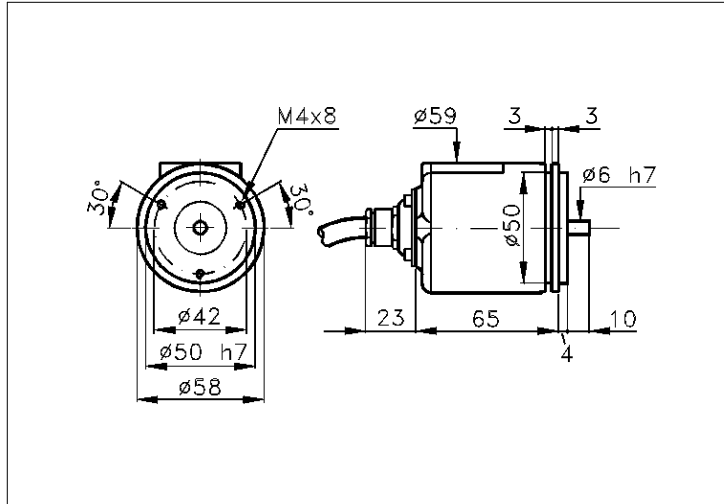

TECHNICAL FEATURES AND POSSIBLE CONFIGURATIONS

- Base.....: ANODIZED ALUMINIUM (*)
 - Cover.....: VALOX 420 (*)
 - Weight.....: 300 g
 - Shaft.....: Ø 6 STAINLESS STEEL (*)
 - Max.rad/axial load.: 3 kg
 - IP output side.(°): see 'CONNECTION' of page 2
 - IP shaft side.(°).> std. 64 sealed 66 low torq. 53
opt. type (page 2).> standard Z B
 - Contin. max RPM(**)> 8000 3000 12000
 - Starting torque gcm> 18 30 8
 - Ball bearings life....: 1,5 x 10⁹ revolutions -
 - Impact resistance....: 50 G x 11ms
 - Vibration resistance.: 12 G (10 ÷ 2000 Hz)
 - Power supply.....: 5÷30V (see page 2)
 - Operating temperature: 0 ÷ 70 °C (*)
 - Storage temperature...: -30 ÷ 85 °C
 - N° of pulses/rev.....: 1 ÷ 25000
 - Max frequency.....: 100 kHz (300 option)
 - Max consumptions mA...: std 120 line driver 180 (*) -
 - Light source.....: LED with >= 100000 h life
- (°) IP according to CEI EN 60529, EN 60529, IEC 529
(*) custom options
(**) intermittent max RPM + 30% of continuous max RPM

ELECTRONICS

CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA	CODE	DESCRIPTION	mA
K	STANDARD NPN	10	N	DRIVER 26LS31	30	D	DISCRIMINAT.	70	Y	SINUSOID.1Vpp	10
Q	NPN OPEN COLL	10	T	TTL 7404	10						
R	NPN OPEN COLL	70	C	DRIVER 88C30	20						
P	PNP	70	L	2x PUSH-P.PRO	70						
U	PNP OPEN COLL	70	M	2x PUSH-PULL	70						
B	PUSH-PULL PRO	70									
H	PUSH-PULL	70									
		(S)			(S)			(S)			(S)


Tolerance between phases ± 25°, symmetry ± 15°

(S) Clock-wise output rotation (see shaft).

POSSIBLE OPTIONS				POSSIBLE CONNECTIONS								
CODE	DESCRIPTION	CODE	DESCRIPTION	CABLE				OUTPUT:				
L	Low temperature	C	Low consumption	CW				AX RAD				
Y	Unbreakable disk	K	Invert. phase A,B,Zero.	CONNECTOR				OUTPUT:				
Z	Sealed ball bearing	J	Zero logic combination	CM	SM	CL	SL	CD	CH	CH5	CI	AX
B	Low torque ball bear.	M	Impregnated electronic	CE			C4	CH6				RAD
H	Different shaft Ø	A	High temperature	CABLE END CONNECTOR				OUTPUT:				
		P	Compressed air attack	VM	TM	VL	TL	VD	VH	VH5	VI	AX
S	160 KHz frequency	G	Tropicalization	VE	VK	TK	VN	VH6	VM5	VM9	VS	RAD
W	300 KHz frequency			VD5								
X	Custom options			TERMINAL BOX				OUTPUT:				
				MS								AX

ORDERING INFORMATION

POSSIBLE SHAFT Ø		CABLE	CONNECTOR	CABLE END CONNECTOR
()	() STANDARD NPN	IP65		IP65 encoder output
()	(K) NPN OPEN COLL		(CM) 7c norm. IP65	(VM) 7c normal
()	(Q) NPN	() 1 m long	(SM) 7c sealed IP66	(TM) 7c sealed
()	(R) NPN OPEN COLL		(CL) 10c norm. IP65	(VL) 10c normal
()	(P) PNP		(SL) 10c sealed IP66	(TL) 10c sealed
()	(U) PNP OPEN COLL		(CD) 9c sub D IP63	(VD) 9c
(n) Ø n upon requ.	(B) PUSH-PULL PRO		(CH) 12c ccw IP67	(VH) 12c anticlock.
()	(H) PUSH-PULL	TERMINAL BOX	(CH5) 12c cw IP67	(VH5) 12c clock-wise
()	(N) DRIVER 26LS31	IP00	(CI) 12c crimp. IP64	(VI) 12c crimped
()	(T) TTL 7404	(MS) Phoenix	(CE) 5c miniat IP64	(VE) 5c
()	(C) DRIVER 88C30			(VK) 17c normal
()	(L) 2x PUSH-P.PRO		(C4) 4c screw IP65	(TK) 17c sealed
()	(M) 2x PUSH-PULL		(CH6) 12c cw IP67	(VN) 12c
()	(D) DISCRIMINAT.			(VH6) 12c clock-wise
()	(Y) SINUSOID.1Vpp			(VM5) 26c
()	(X) CUSTOM OPTION			(VM9) 16c
()				(VS) 12c
()				(VD5) 9c screened

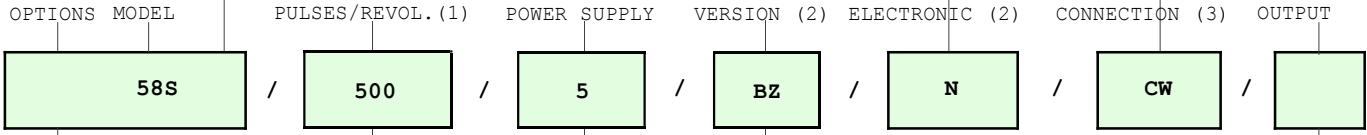

(L)	(C)	1 ÷ 25000	(5) 5 V ±5%	(M) Monodirectional	AX ()
(Y)	(K)		(824) 8÷24 V	(B) Bidirectional	RAD (R)
(Z)	(J)		(1828) 18÷28 v	(BZ) Bidirectional + zero	
(B)	(M)		(815) 8÷15 V	(MZ) Monodirectional + zero	
(H)	(A)		(12) 12 V ±5%		
()	(P)		(24) 24 V ±5%		
()	()		(1230) 12÷30/12 V		
(S)	(G)		(8245) 8÷24/5 V		
(W)	()		(1030) 10÷30 V		
()	()		(18285) 18÷28/5 V		
()	()		(1530) 15÷30/15 V		
(X)	()		()		

NOTE: FOR 88C30 MAX 15 Vdc

(1) For further information see PULSES/REVOL. data sheet
 For further information see ELECTRONIC data sheet
 (3) For further information see CONNECTION data sheet

Product manufactured according to UNI EN ISO 9001:2000,
 supplied with CHECKING and CONFORMITY
 declaration with CE mark and with TWO (2) YEARS⁽²⁾
 WARRANTY starting from delivery date.